



MANUFACTURER OF SAFETY MATERIAL
 Z.I. des Richardets
 34, Allée du Closeau
 93160 Noisy Le Grand
 France



REACH CONFORMITY

DECLARATION OF CONFORMITY

This document is the conformity declaration concerning safety switches and relays, conform to the Machine Directive 2006/42/CE and the EMC Directive 2004/108/CE.

ELECTROMECHANICAL SAFETY MODULES

Range	Standards	Approvals	Category ISO 13849-1
CO13XXL 85-265VAC	ISO 13849-1 EN 60947-5-1 EN 61000-6-2 : jan 2006 EN 61000-6-4 : mar 2007	CE	<div style="border: 1px solid black; padding: 5px;"> Performance Level (PL) = e Safety category = 3 or SIL2 MTTFd = 320 years DC = 99,5 % CCF = 90 % TM= 20 years </div>

Test conditions :
 Switching Current=5 A / 250 Vac ou 5 A / 50Vdc
 Power Supply=230VAC
 Ambient Temperature=+25 °C

This product range is intended to monitor an emergency stop, a safety sensor

The safety modules is designed and manufactured following UL508 / CSA C22.2 regulation.

Safety modules must be used following diagram and directives described in our data sheet.

Noisy le Grand, 14th Oct. 2010

For BTI,
 Mrs Michèle LEFOULON ,



CO13 XXL 120-240V safety module technical data sheet

Thank you for your confidence in BTI products.
This product has been designed and manufactured to the highest quality standards.

1. Application

The CO13 XXL 120-240V, category 3 (as per the cabling and configuration) according to EN954-1 is a safety module designed to control mechanical switches, switches using ACOTOM® and ACOTOM3® process (BTI's trademark), or emergency push buttons. The device to be self-controlled should be connected to a common point and free of potential. This module has two safety lines (2 NO), and each line has a switching capacity of 8A/250VAC and a NC auxiliary line of 8A/250VAC.

2. Mounting instructions

22.5 mm wide case with plugs in terminals mountable on a symmetrical DIN rail 35 mm according to DIN 50022.
The max. tightening couple of the terminals is 0.5 Nm.
The maximum diameter of the wiring cable is 1.5 mm².

3. Functioning

Select the reset mode by means of a switch at the back of the module. Connect one switch or a safety switch. Starting modes : the lines 13/14, 23/24 are opened and the line 41/42 is closed. LED ON lit up.

Switch in N position (normal mode)

a) The system is reset by an impulse on a NO contact connected in the X1/X2 line. When the contact closes, the system stays in the same position but as soon as the contact opens, and if the C/E1 and C/E2 lines are closed, then the lines 13/14, 23/24 close and the line 41/42 opens. The LED V1 and V2 light on.

b) If the 2 lines C/E1 and C/E2 open simultaneously, the safety lines change to their starting mode and the LED V1/V2 turns off.

c) If only one line opens (ex:C/E1), the safety lines change to their starting mode and only the LED V1 turns off. The safety lines stay locked in this position : an action on the X1/X2 action will have any effect. Check the C/E2 line in this example.

Switch in SR position

a) The reset contact can be replaced by a wire : in this case, it is an automatic reset mode.

b) If we keep the reset contact in the loop, we do not control any more the opening of this contact. You only need to have a contact in the X1/X2 line to reset the module.

Caution : the module is automatically reset as soon as the default disappears. Its application has been prohibited in the area access control.

Wiring in Monochannel

The terminals E1 and E2 must be linked together and the contact to be selfcontrolled is connected between C and the connection E1-E2. In this mode, the system is category 2 according to EN954-1 with the wiring of a reset loop.

Advice

The installation has to be checked periodically. Our engineers team stays at your disposal to answer your questions and analyse all your specific demands (studies, specific needs). Please do not hesitate to contact us.


4. Technical characteristics

Power Supply	85-265VAC 50Hz/60Hz
Range of supply	-15 % / +10 %
Consumption	< 4,5 VA
Safety lines	2 x 8A / 250VAC
Auxiliary lines	1NF 8A/250Vac & 1NO 0,4A 24Vac/dc
Power Switching	50 mW to 2000 W
MTTFd / DC	320 yr / 90 %
Response Time	20ms
Temperature	-20 °C / +60 °C
Protection Class	IP20
Dimensions LxWxH	22.5 x 100 x 111 mm
Poids	125 g

5. Wiring examples

a) Wiring example cat.3 in dual channel

Safety line : 13/14 (8A), 23/24 (8A)
Auxiliary line : 33/34 (400mA), 41/42 (8A)

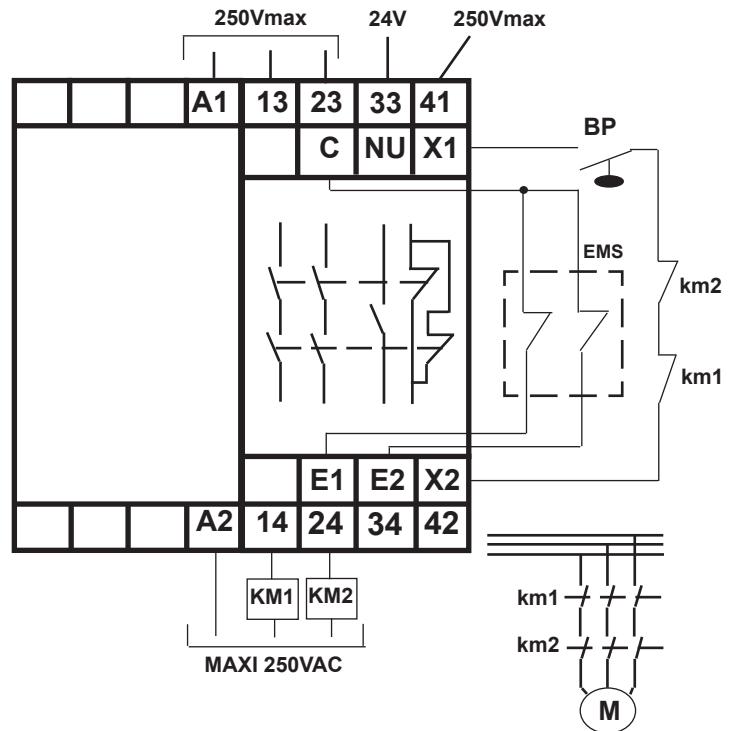

b) Wiring example cat.2 in monochannel

The wiring is the same as in part a) except that the terminals E1 and E2 are linked together.



CAUTION :

Check the position of the switch N/SR at the back of the device