



Permanent light element 641

(provisional technical data sheet)

WERMA Signaltechnik
GmbH + Co.
Dürbheimer Straße 15
D-78604 Rietheim-Weilheim
Phone 0049/7424/9557-0
Fax 0049/7424/9557-44

Electrical specifications:

Operating voltage: $U_{nenn} = \text{max. } 250V$
Bulb: max. 7W
Working life: depending on the bulb used

Order-No.:

641 X00 00 Permanent light element
X 1=red 2=green 3=yellow 4=clear 5=blue

Mechanical specifications:


Material: Polycarbonate
Socket: B15d (Bayonet)
Seal: premounted with each element

Further specifications:

Mass: ca. 55g
Temperature: $t_a -20^\circ C \text{ bis } +60^\circ C$
Protection rating: IP 65 when mounted or with cap

Regulations: Conform to current EC- regulations.
UL-listed.

All specifications refer to U_{nenn} and room temperature!

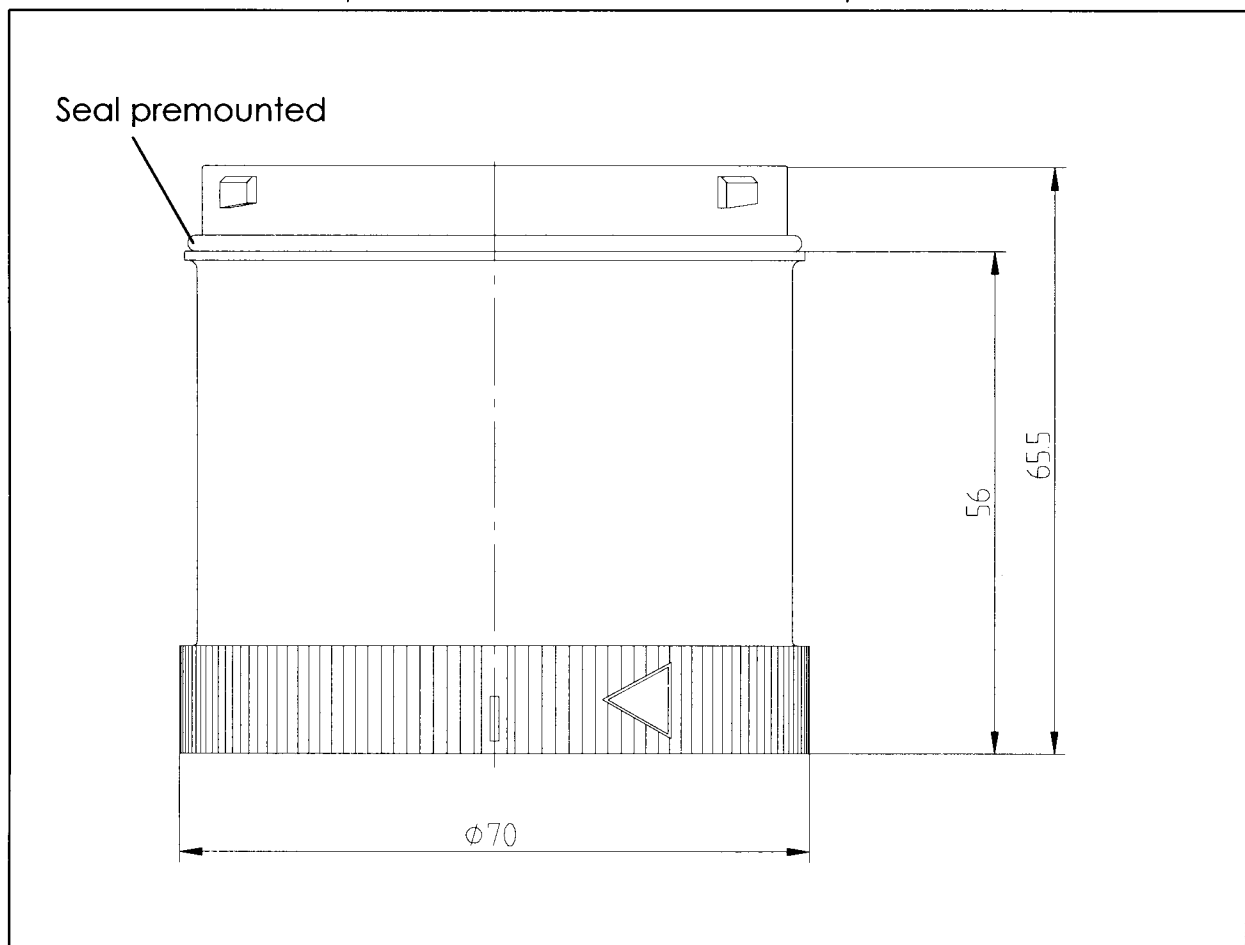

| | Drawn up | proved | released | Data-sheet-No. |
|------|------------------|------------|------------|----------------|
| Name | E. Rudischhauser | <i>ERS</i> | <i>RC</i> | 000 641 501 |
| Date | 2001-11-06 | 2001-11-06 | 2001-11-09 | Page 1 of 1 |